


DATE	
PROJECT	
TYPE	

FEATURES

- Ultra-low profile linear fixture
- Enclosed remote external driver
- 4' & 8' individual units
- Efficacy up to 150 LPW
- 2.5 MacAdam ellipse binning
- Soft diffuse lighting
- Clear or black anodize
- Custom colors available upon request
- Approved for dry and damp locations
- 5 year warranty
- Made in the USA

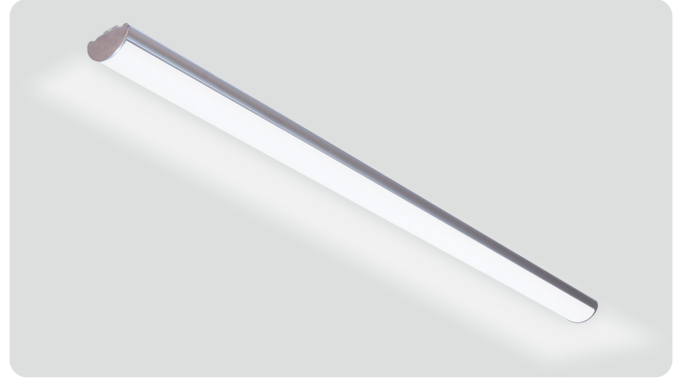

SPECIFICATIONS

PERFORMANCE (STANDARD OUTPUT, CRI 80+)			
Model	Lumens	Watts	LPW
SB-N-4S-35K	3,068	22.8	134
SB-N-4S-40K	3,068	22.8	134
SB-N-4S-50K	3,068	22.8	134
SB-N-8S-35K	6,630	45.0	147
SB-N-8S-40K	6,653	44.8	148
SB-N-8S-50K	6,704	44.5	150

*Performance measured at 120 VAC

ORDERING INFORMATION

SERIES	MODEL	LENGTH	OUTPUT	COLOR TEMP.	FINISH
SB	N = Narrow	4 = 4' 8 = 8'	S = Standard	35K = 3500K 40K = 4000K 50K = 5000K	CA = Clear Anodize BA = Black Anodize PO = Powder Coat Other
FIXTURE TO DRIVER WIRING	DRIVER TO MAINS WIRING	MOUNTING ACC.	DIMMING OPTIONS	VOLTAGE	PLUG
ECTW05 = Cord, Top Exit, White 5' ECTW10 = Cord, Top Exit, White 10' ECTB05 = Cord, Top Exit, Black 5' ECTB10 = Cord, Top Exit, Black 10' ECEW05 = Cord, End Exit, White 5' ECEW10 = Cord, End Exit, White 10' ECEB05 = Cord, End Exit, Black 5' ECEB10 = Cord, End Exit, Black 10'	ECDW05 = Cord, White 5' ECDW10 = Cord, White 10' ECDB05 = Cord, Black 5' ECDB10 = Cord, Black 10' IC = Wire/Conduit Into Driver Enclosure	PMGC05 = Pendant Mount w/ Grippers and 5' Cables w/ Loops PMGC10 = Pendant Mount w/ Grippers and 10' Cables w/ Loops SM = Surface Mount	ND = No Dimming AD = 0-10V Dimming	U = 120-277	PN = No Plug P1 = L5-15p P2 = L6-15p P3 = L7-15p

Example: SB-N-4S-35K-CA-ECTW05/ECDW05-PMGC05-ND-U-PN

StarBar™

CONSTRUCTION

DIMENSIONS


Model	Nominal Length	Length	Weight
SB-N-4	4 ft.	48.0" (1,219mm)	2.75 lbs (1.2kg)
SP-N-8	8 ft.	96.0" (2,348mm)	4 lbs. max (1.8kg)

MATERIALS

Housing	Aluminum Extrusion
Finish	Clear Anodize Black Anodize Various
Lens Cover	Frosted Acrylic (Impact Resistant)


ELECTRICAL

Input Voltage	120-277 Vac
Hertz	50/60
Input Current	SB-N-8: .54 - .23A SB-N-4: .54 - .23A
Operating Temp.	-20°C to +50°C -4°F to +122°F
Power Factor	> 0.9
THD	< 20%

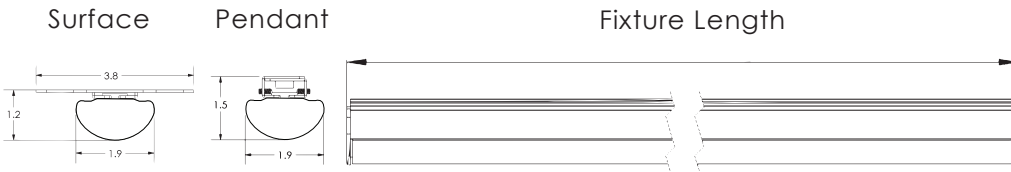


MOUNTING

Pendant




Surface



*Pendant mount comes with gripper to accept cable.

PHOTOMETRICS: SB-N-4S-40K

POLAR CANDELA DISTRIBUTION

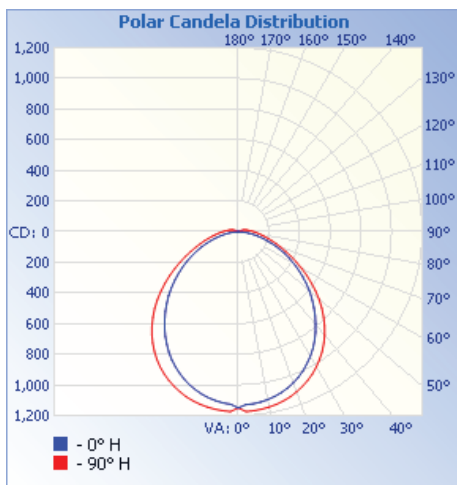

ISOFOOTCANDLE PLOT

