

DATE	
PROJECT	
TYPE	

FEATURES

- Ultra-low profile linear fixture
- Enclosed remote external driver
- 4' & 8' individual units
- Efficacy up to 142 LPW
- 2.5 MacAdam ellipse binning
- Soft diffuse lighting
- Clear anodize
- Custom colors available upon request
- Approved for dry and damp locations
- 5 year warranty
- Made in the USA



SPECIFICATIONS

PERFORMANCE (STANDARD OUTPUT, CRI 80+)				
Model	CRI	Lumens	Watts	LPW
SB-W-4-4K	>80	7,732	65	118
SB-W-4-5K		8,574	65	131
SB-W-8-5K		13,925	98	142

*Performance measured at 120 VAC

ORDERING INFORMATION

SERIES	MODEL	LENGTH	OUTPUT	COLOR TEMP.	FINISH
SB	W = Wide	4 = 4' 8 = 8'	S = Standard	40K = 4000K 50K = 5000K	CA = Clear Anodize PO = Powder Coat Other

FIXTURE TO DRIVER WIRING	DRIVER TO MAINS WIRING	MOUNTING ACC.	OPTIONS	DIMMING OPTIONS	VOLTAGE	PLUG
ECTW05 = Cord, Top Exit, White 5'	ECDW05 = Cord, White 5'	PMGC05 = Pendant Mount w/ Grippers and 5' Cables w/ Loops	NS = No Dimming	ND = No Dimming	U = 120-277	PN = No Plug
ECTW10 = Cord, Top Exit, White 10'	ECDW10 = Cord, White 10'	PMGC10 = Pendant Mount w/ Grippers and 10' Cables w/ Loops		AD = 0-10V Dimming		P1 = L5-15p
ECTB05 = Cord, Top Exit, Black 5'	ECDB05 = Cord, Black 5'	SM = Surface Mount				P2 = L6-15p
ECTB10 = Cord, Top Exit, Black 10'	ECDB10 = Cord, Black 10'					P3 = L7-15p
ECEW05 = Cord, End Exit, White 5'	IC = Wire/Conduit Into Driver Enclosure					
ECEW10 = Cord, End Exit, White 10'						
ECEB05 = Cord, End Exit, Black 5'						
ECEB10 = Cord, End Exit, Black 10'						

Example: SB-W-4-5K-DL-SM-AD

StarBar™ Wide

CONSTRUCTION

DIMENSIONS


Model	Nominal Length	Length	Weight
SB-N-4	4 ft.	48.0" (1,219mm)	2.75 lbs (1.2kg)
SP-N-8	8 ft.	96.0" (2,348mm)	4 lbs. max (1.8kg)

MATERIALS

Housing	Aluminum Extrusion
Finish	Clear Anodize Black Anodize Various
Lens Cover	Frosted Acrylic (Impact Resistant)


ELECTRICAL

Input Voltage	120-277 Vac
Hertz	50/60
Input Current	SB-N-8: .54- .23A SB-N-4: .54 - .23A
Operating Temp.	-20°C to +50°C -4°F to +122°F
Power Factor	> 0.9
THD	< 20%

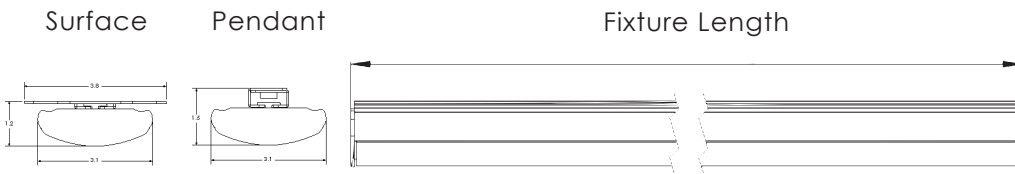


MOUNTING

Pendant

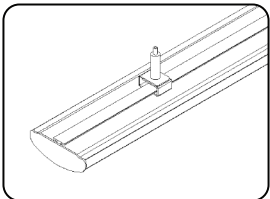


*Pendant mount comes with gripper to accept cable.

Surface

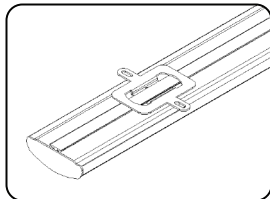

PHOTOMETRICS: SB-W-4-5K

POLAR CANDELA DISTRIBUTION

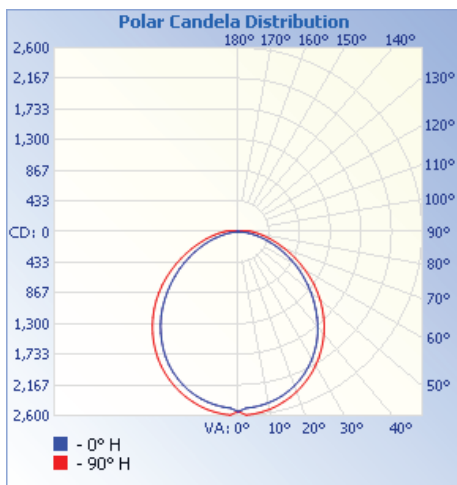

ISOFOOTCANDLE PLOT

