



STARPOWER™ Wide LINK SERIES

StarPower Wide Link is a luminaire linking system requiring only one single power drop for long runs of continuous lighting (up to 200ft on 277V). Each fixture has an internal driver and independently carries branch circuit voltage and 0-10V dimming to the next fixture. Installation or removal of any single fixture can be done independently in minutes.

StarPower Wide Link has been optimized to achieve best-in-class efficacy with a highly diffused lens cover. A variety of mounting options are offered to make it the highlight of any area.

Suitable for damp and dry locations. Consult factory for additional sizes and options.



SPECIFICATIONS

PERFORMANCE

Model	CRI	Lumens	Watts	LPW
SP-W-8-50K	> 80	11,374	82.0	138.0
SP-W-8-40K		10,998	83.5	131.7

* Performance measured at 120 VAC


ELECTRICAL

Input Voltage	120-277 Vac
Input Current	SP-W-8: .7 - .3A
Operating Temp.	-20°C to +50°C -4°F to +122°F
Power Factor	> 0.9
THD	< 20%

CONSTRUCTION

Housing	Aluminum Extrusion
Finish	Clear Anodize, Various Powder Coat
Lens Cover	Frosted
Mounting	Surface, Pendant

SYSTEM OVERVIEW

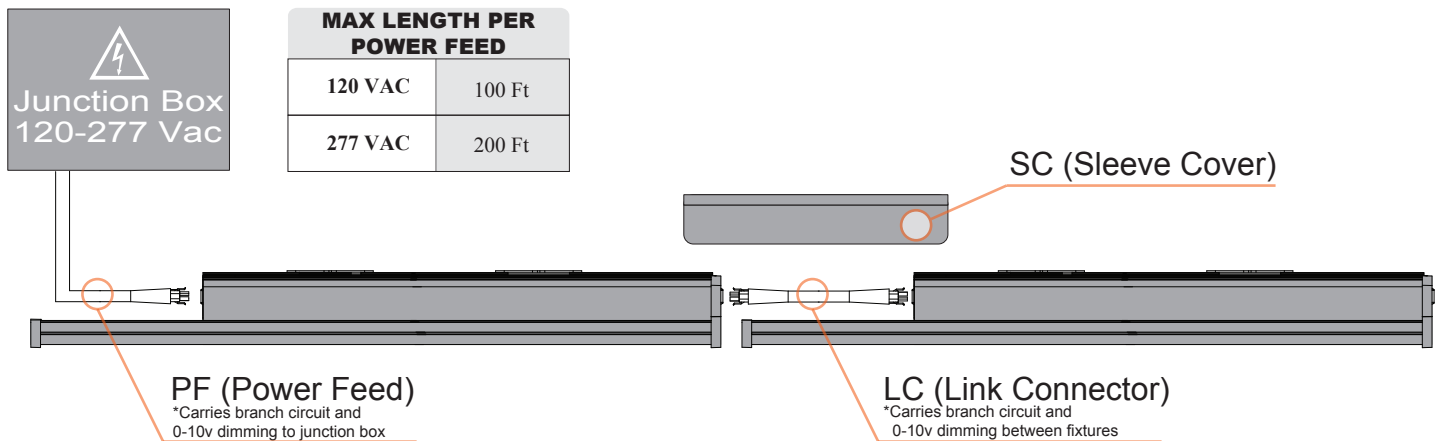

ORDERING INFORMATION

SERIES	MODEL	LENGTH	COLOR TEMP.	FINISH	WIRING OPTIONS	MOUNTING ACC.	SENSORS	REMOTE DIMMING	VOLTAGE	PLUG
SP	W = Wide	8 = 8 Feet	50K = 5000K 40K = 4000K	CA = Clear Anodize BA = Black Anodize PO = Powder Coat Other	LS = Link Series	SM = Surface Mount PM = Pendant Mount w/ sleeve	NS = No Sensor DM = Daylight/ Motion MS = Motion Sensor	AD = 0-10 Dimming	U = 120/277	PN = No Plug P1 = L5-15p P2 = L6-16p P3 = L7-15p

Example: SP-W-8-50K-CA-LS-SM-NS-AD-U-PN

*Bold indicates standard product options

ACCESSORIES

PF = Power Feed
LC = Link Connector
SC = Sleeve Cover

5 YEAR WARRANTY




STARPOWER™ *Wide Link Series*


DIMENSIONS

VARIATIONS

Model	Nominal Length	Luminaire Length	Raceway Length	Width	Height	Weight
SP-W-8	8 ft.	91.6" (2,326.6mm)	83.5" (2121mm)	3.2" (81.3mm)	3.1" (78.7mm)	16 lbs. max (7.3kg)

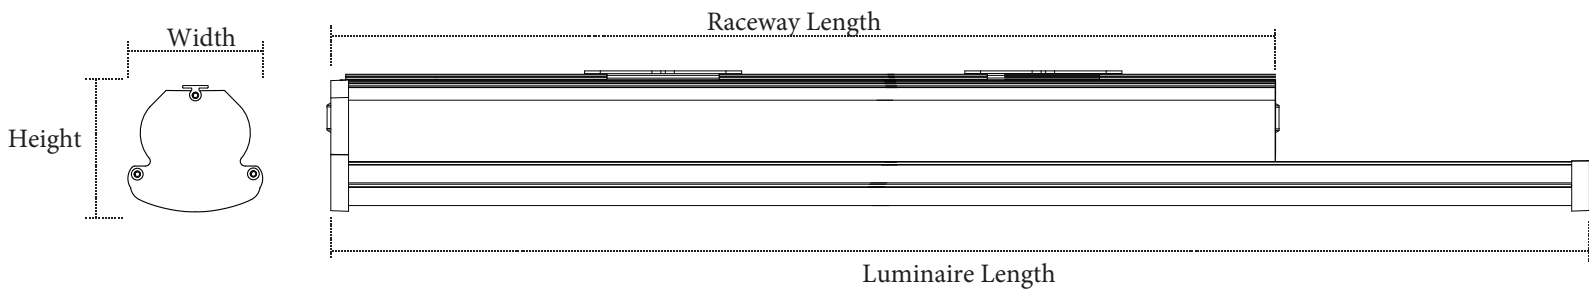

MOUNTING

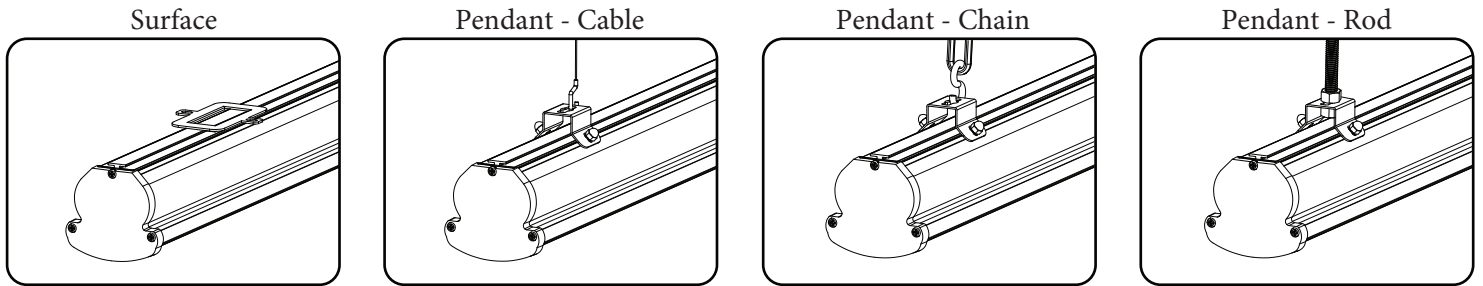

Customer supplied cable, chain or rod